



# ACGI059064-P39-1

## C-band matched GaAs Device

### Features:

Frequency: 5.9~6.4GHz

1dB Output Power :  $P_{1dB}=39.5dBm$ (type)

PowerGain: Gain=8.5dB(type)

Add-Efficiency: PAE=30%(type)

Port matching:  $Z_{in}/Z_{out}=50\Omega$

### Description:

ACGI059064-P39-1 is an internal matching GaAs device, which adopts advanced co-planar internal matching MCM and thin film circuit technology. The typical working frequency range is 5.9~6.4GHz. This device can be used in different RF/Microwave system and subsystem. The high output power level, high efficiency and wide operating temperature range can make application very flexible.


Maximun Ratings (TC=25°C, Not recommended working under this condition):


	Symbol	Value	Unit
Voltage between source and drain	$V_{ds}$	11	V
Voltage between gate and source	$V_{gs}$	-3	V
Storage Temperature Range	$T_{stg}$	-65 to +150	°C
Drain and Source Channel Temperature	$T_{ch}$	150	°C

## Electrical Characteristics:


	Symbol	Test condition	Value			Unit
			Min	Typ	Max	
Drain Current	I <sub>dsr</sub>	V <sub>ds</sub> =10V CW. P <sub>in</sub> : 31dBm Freq: 5.9~6.4GHz	-	2.2	-	A
1dB output power	P <sub>1dB</sub>		39	39.5	-	dBm
Gain	G <sub>p</sub>		8	8.5	-	dB
Add-Efficiency	PAE		-	30	-	%
Gain Flatness	ΔG		-0.8	-	+0.8	dB

## Typical Curve:

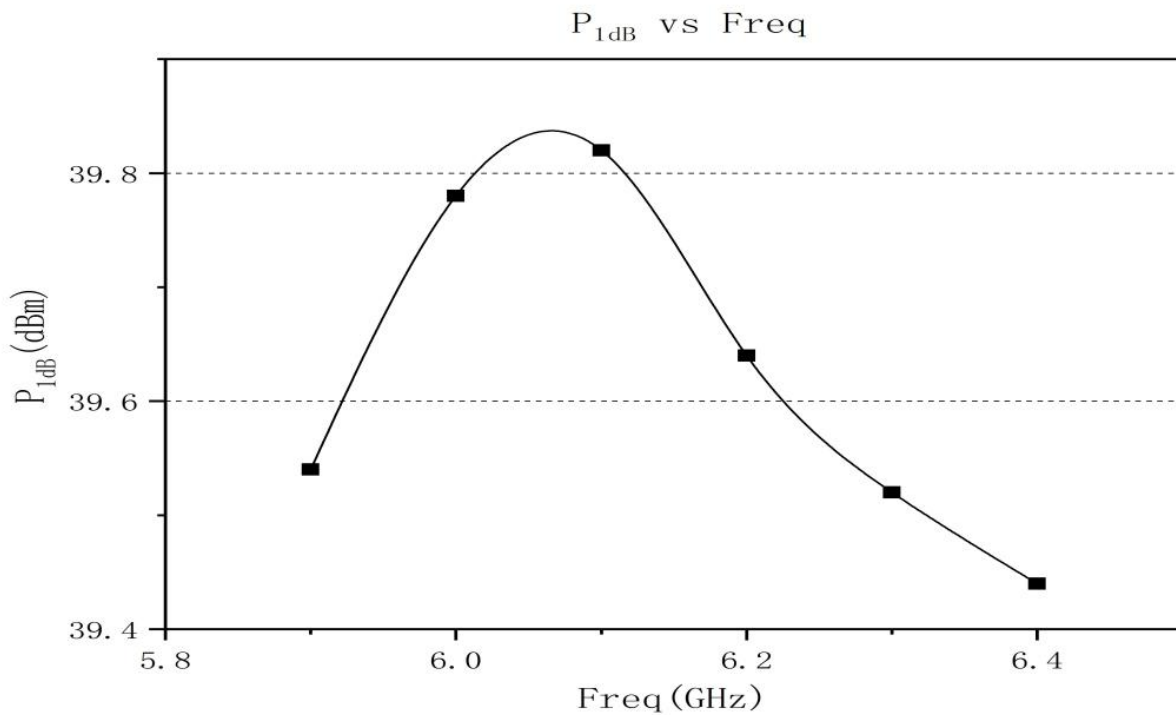

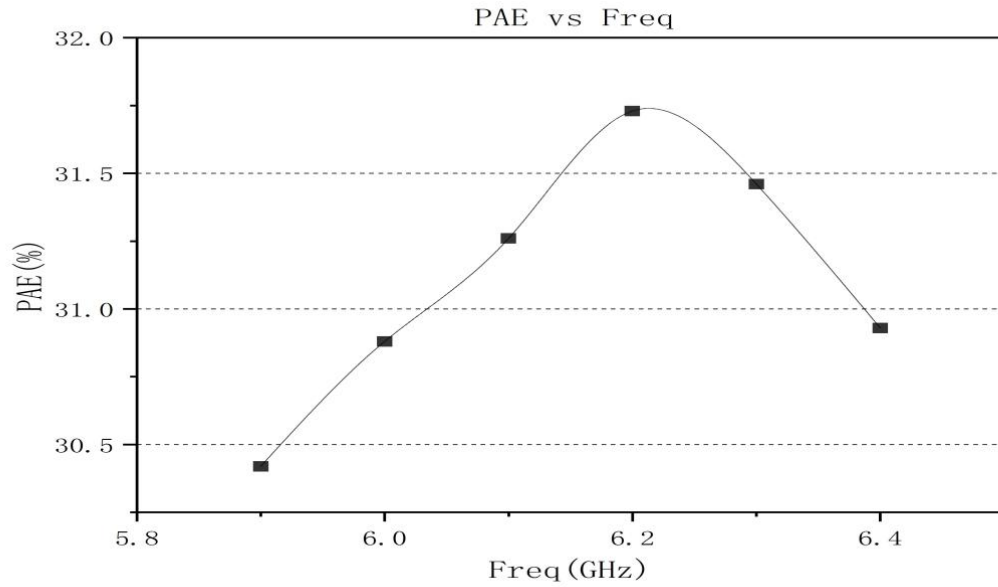

## Application Circuit:

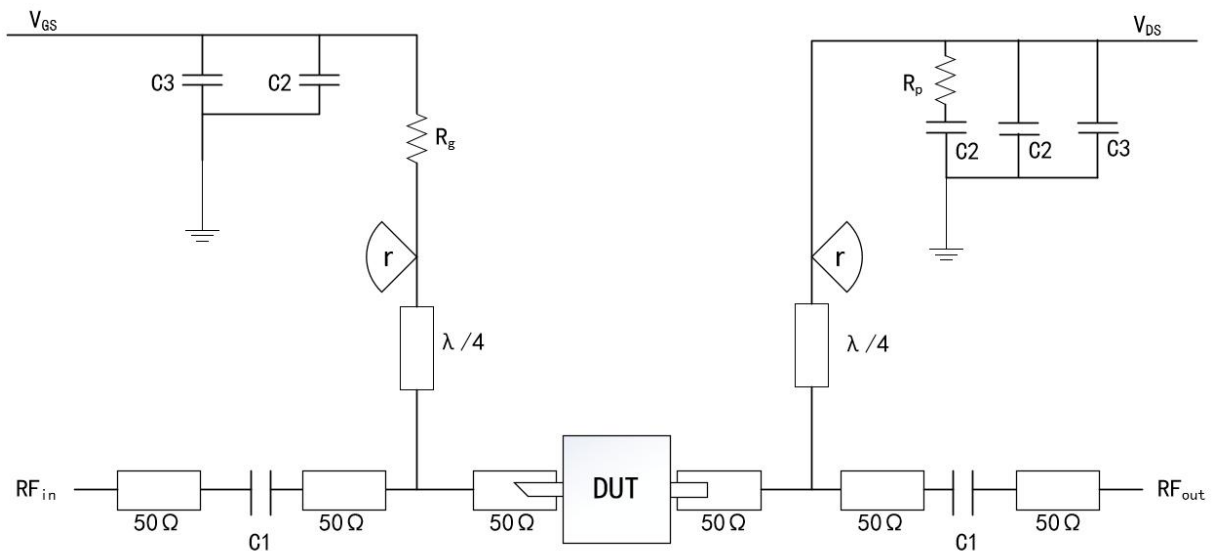

## DUT: Device to be tested


C1:3pF  
C2:1000pF  
C3:100uF

R<sub>p</sub>:51Ω  
R<sub>g</sub>:15Ω  
r(radius)≈4.5mm(Rogers5880, 20mil)

## ESD Level:

ESD	Class III	2000V
-----	-----------	-------

## Outline:

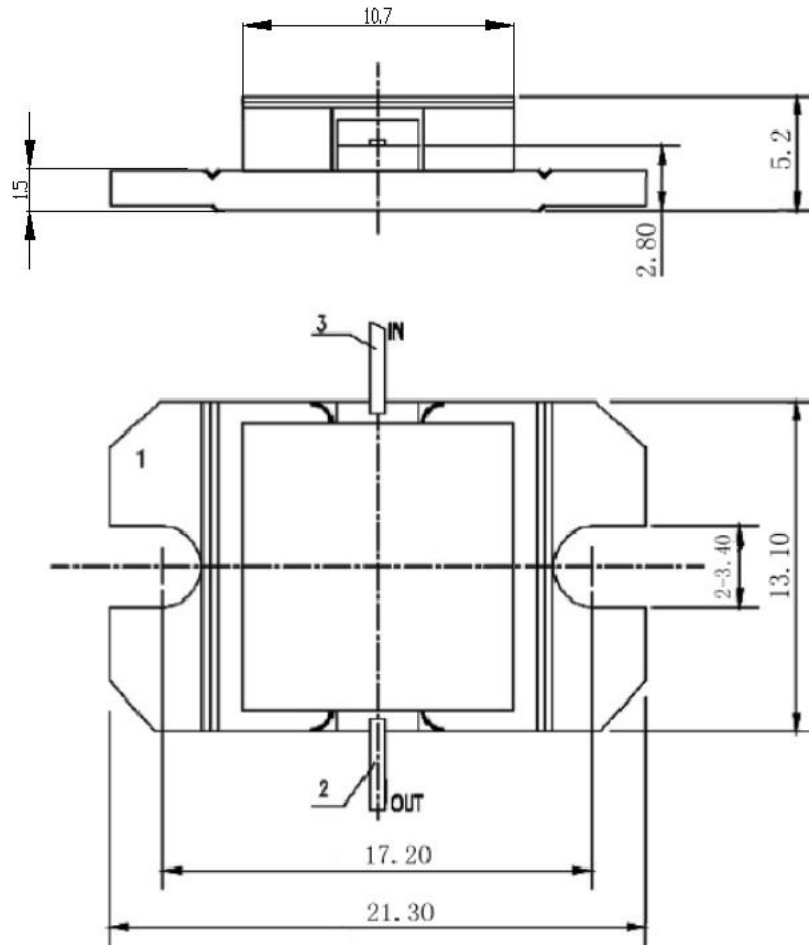

## Precautions for use:

- Pay attention to drying transportation and storage.
- Pay attention to anti-static during chip use and assembly, and wear grounding anti-static bracelet.
- When powering up, first apply grid power then add leakage.