



## ANMI057059-P47

C-band matched GaN power amplifier module

### Features:

Frequency: 5.75~5.85GHz

Saturated Output Power:  $P_{sat} \geq 47\text{dBm}$

PowerGain:  $\text{Gain} \geq 27\text{dB}$

Add-Efficiency:  $\text{PAE} = 50\%$ (type)

Port Matching:  $Z_{in}/Z_{out} = 50\Omega$

### Description:

ANMI057059-P47 is an internal matching GaN power amplifier module, which adopts advanced co-planar internal matching MCM and thin film circuit technology. The typical working frequency range is 5.75~5.85GHz. This device can be used in different RF/Microwave system and subsystem. The high output power level, high efficiency and wide operating temperature range can make application very flexible.


### Maximun Ratings (TC=25°C, Not recommended working under this condition):


	Symbol	Value	Unit
Voltage between source and drain	$V_{DS}$	40	V
Voltage between gate and source	$V_{GS}$	-5	V
Storage Temperature Range	$T_{stg}$	-65 to +175	°C
Drain and Source Channel Temperature	$T_{ch}$	175	°C

## Electrical Characteristics:


	Symbol	Test condition	Value			Unit
			Min	Typ	Max	
Drain Current	$I_{dsr}$	V <sub>ds</sub> =28V CW. P <sub>in</sub> : 20dBm Freq: 5.75~5.85GHz	-	3.6	-	A
Saturated Output Power	$P_{sat}$		47	-	-	dBm
Gain	$G_p$		27	-	-	dB
Add-Efficiency	PAE		-	50	-	%
Gain Flatness	$\Delta G$		-0.8	-	+0.8	dB

## Typical Curve:

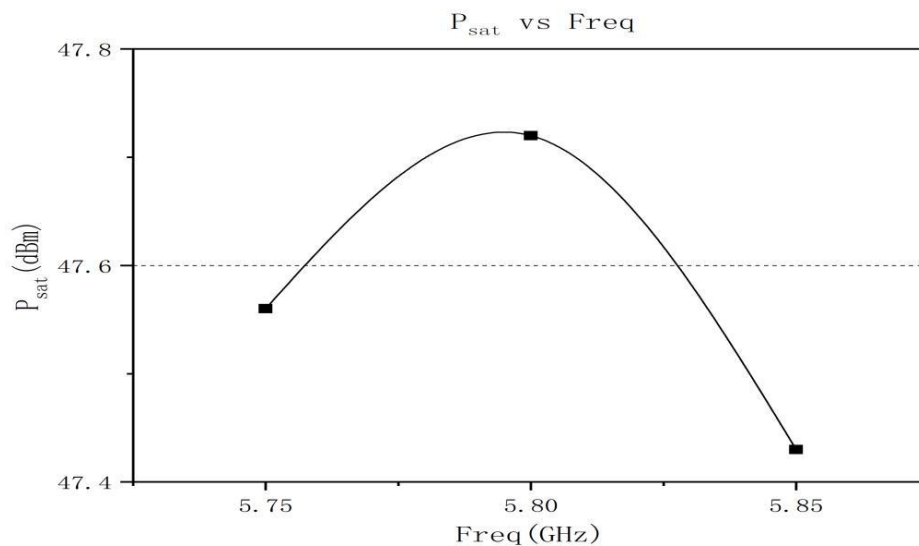

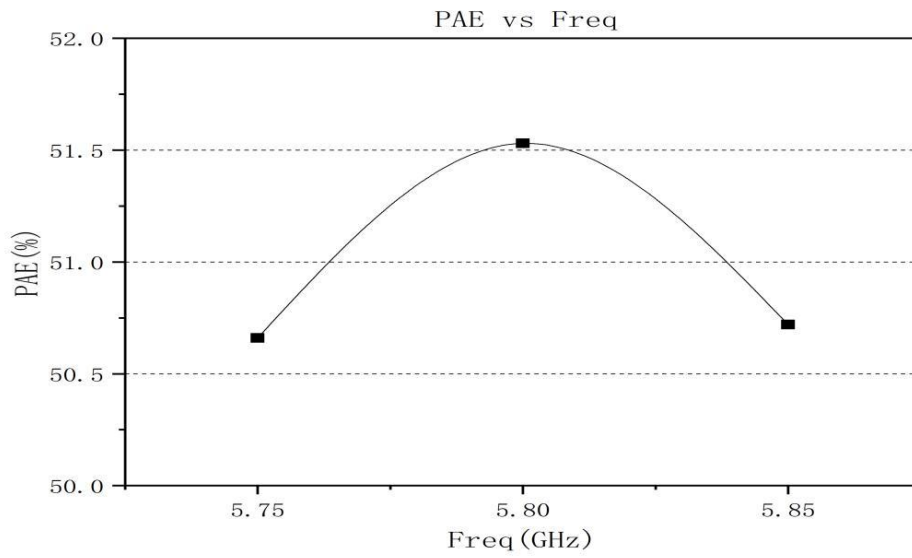


## Application Circuit:

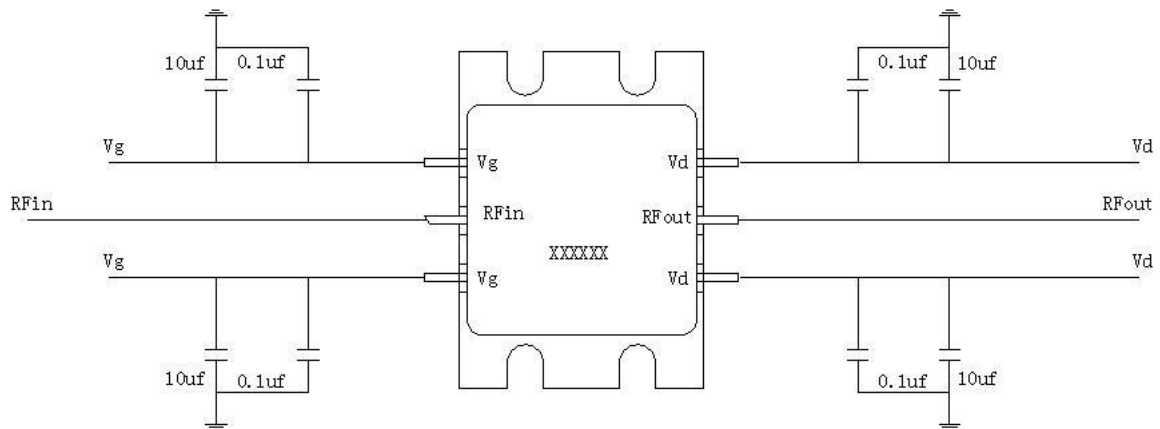

## ESD Level:

ESD	Class III	2000V
-----	-----------	-------

## Outline:

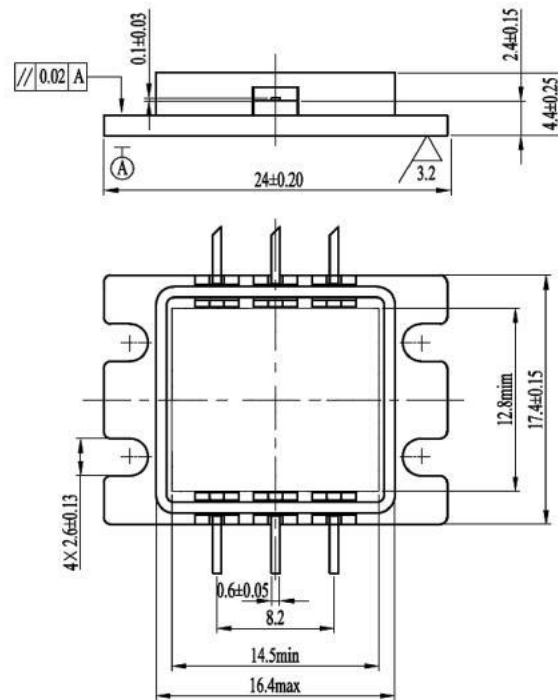

## Precautions for use:

- Pay attention to drying transportation and storage.
- Pay attention to anti-static during chip use and assembly, and wear grounding anti-static bracelet.
- When powering up, first apply grid power then add leakage.