

ANGI077085-P40

Internal Matching GaN Device

Features:

Frequency: 7.7~8.5GHz

Saturated Output Power: Psat≥40dBm

PowerGain: Gain≥9dB

Add-Efficiency: PAE≥38%

Port Matching: Z_{in}/Z_{out}=50Ω

Description:

ANGI077085-P40 is an internal matching GaN device, which adopts advanced co-planar internal matching MCM and thin film circuit technology. The typical working frequency range is 7.7~8.5GHz. This device can be used in different RF/Microwave system and subsystem.

The high output power level, high efficiency and wide operating temperature range can make application very flexible.

Maximun Ratings (TC=25°C, Not recommended working under this condition):


	Symbol	Value	Unit
Voltage between source and drain	V _{DS}	40	V
Voltage between gate and source	V _{GS}	-5	V
Storage Temperature Range	T_{stg}	-65 to +175	°C
Drain and Source Channel Temperature	Tch	175	°C




Electrical Characteristics:

				Value		
	Symbol	Test condition	Min	Тур	Max	Unit
Drain Current	t Idsr	-	0.8	-	Α	
Saturated Output Power	Psat	Vds=28V CW. Pin: 31dBm Freq: 7.7~8.5GHz	40	-	-	dBm
Gain	Gp		9	-	-	dB
Add-Efficiency	PAE		38	-	-	%
Gain Flatness	ΔG		-0.8	-	+0.8	dB


Typical Curve:

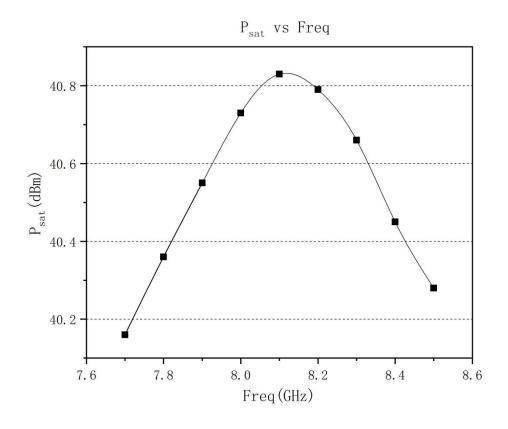

Internal Matching GaN Device

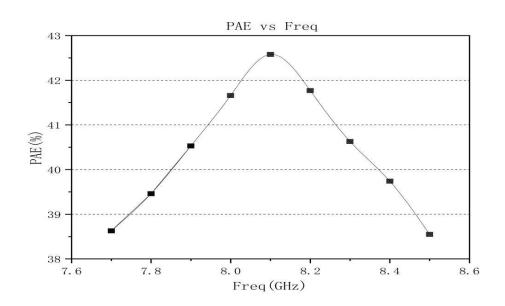

Application Circuit:

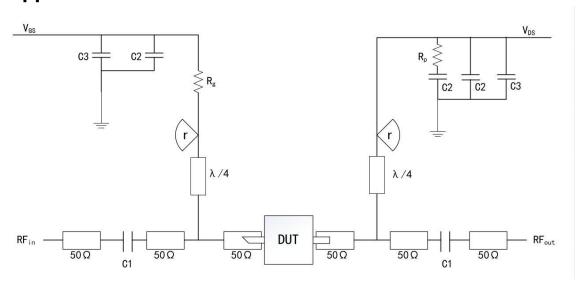

DUT: Device to be tested

C1:3pF R_p :51 Ω

C2:1000pF R_G :15 Ω


C3:100uF r(radius)≈4.5mm(Rogers5880, 20mil)



ESD Level:

ESD	Class III	2000V

Outline:

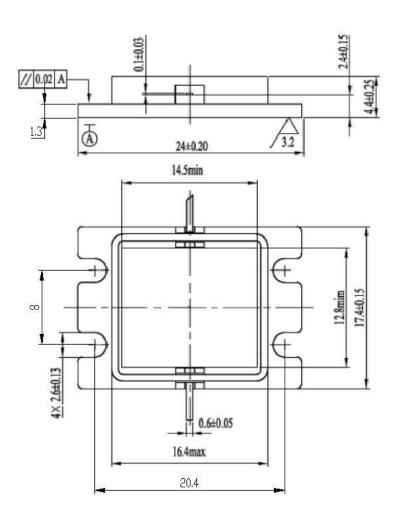

Precautions for use:

- Pay attention to drying transportation and storage.
- Pay attention to anti-static during chip use and assembly, and wear grounding anti-static bracelet.
- When powering up, first apply grid power then add leakage.