



# ACGI052059-P40.5

#### C-band matched GaAs Device

#### Features:

Frequency: 5.2~5.9GHz

Saturated Output Power : Psat≥40.5dBm

PowerGain: Gain≥9dB Efficiency: η=35%(type)

Port matching:  $Zin/Zout=50\Omega$ 

### Description:

ACGI052059-P40.5 is an internal matching GaAs device, which adopts advanced co-planar internal matching MCM and thin film circuit technology. The typical working frequency range is 5.2~5.9GHz. This device can be used in different RF/Microwave system and subsystem. The high output power level, high efficiency and wide operating temperature range can make application very flexible.

# Maximun Ratings (TC=25 $^{\circ}$ C, Not recommended working under this condition):

	Symbol	Value	Unit
Voltage between source and drain	Vds	11	V
Voltage between gate and source	Vgs	-3	V
Storage Temperature Range	Tstg	-65 to +150	°C
Drain and Source Channel Temperature	Tch	150	°C






# **Electrical Characteristics:**


			Value			
	Symbol	Test condition	Min	Тур	Max	Unit
Drain Current	ldsr	Vds=10V CW. Pin: 31.5dBm Freq: 5.2~5.9GHz	-	3.2	-	Α
Saturated output power	Psat		40.5	-	-	dBm
Gain	Gp		9	-	-	dB
Efficiency	η		-	35	-	%
Gain Flatness	ΔG		-0.8	-	+0.8	dB

# **Typical Curve:**

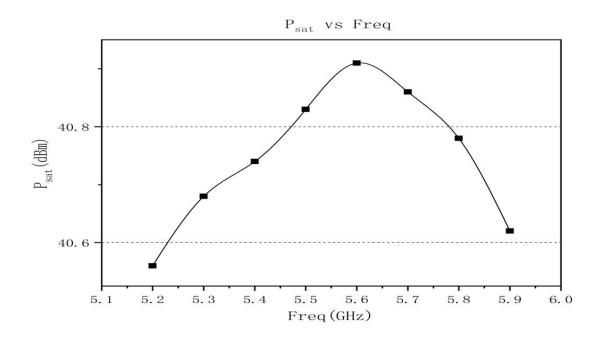




# **Internal Matching GaAs Device**

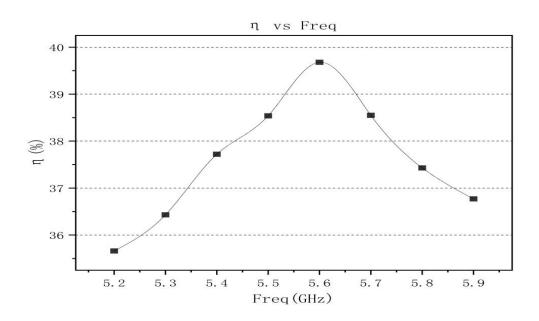

# **Application Circuit:**

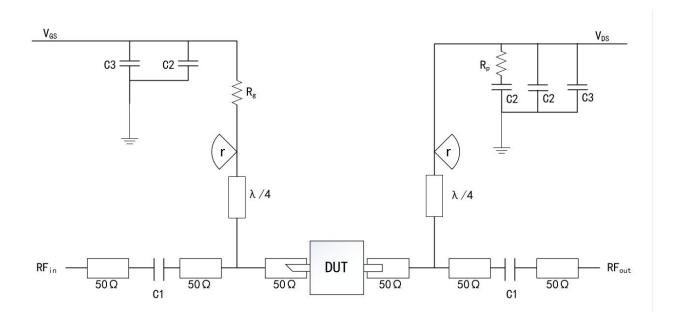

#### **DUT: Device to be tested**

C1:4.7pF Rp:51 $\Omega$  C2:1000pF Rg:15 $\Omega$ 

C3:100uF r(radius)≈5.8mm(Rogers5880, 20mil)


# AnserRF

# **Internal Matching GaAs Device**

#### **ESD Level:**

ESD	Class III	2000V

# **Outline:**

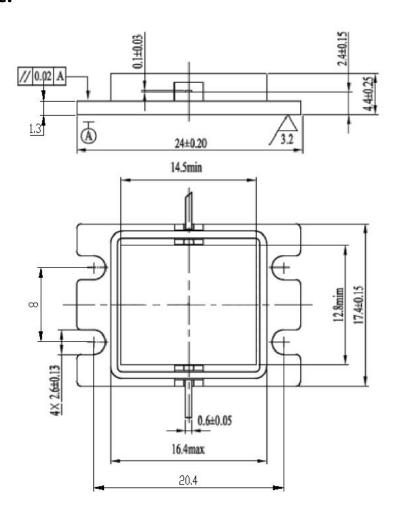

#### **Precautions for use:**

- Pay attention to drying transportation and storage.
- Pay attention to anti-static during chip use and assembly, and wear grounding anti-static bracelet.
- When powering up, first apply grid power then add leakage.