

ACGI059064-P41-1

C-band matched GaAs Device

Features:

Frequency: 5.9~6.4GHz 1dB Output Power : P_{1dB}=41.5dBm(type) PowerGain: Gain=8.5dB(type) Add-Efficiency: PAE=30%(type) Port matching: Zin/Zout=50Ω

Description:

ACGI059064-P41-1 is an internal matching GaAs device, which adopts advanced co-planar internal matching MCM and thin film circuit technology. The typical working frequency range is 5.9~6.4GHz. This device can be used in different RF/Microwave system and subsystem. The high output power level, high efficiency and wide operating temperature range can make application very flexible.

Maximun Ratings (TC=25 $^{\circ}$ C, Not recommended working under this condition):


	Symbol	Value	Unit
Voltage between source and drain	Vds	11	V
Voltage between gate and source	Vgs	-3	V
Storage Temperature Range	Tstg	-65 to +150	°C
Drain and Source Channel Temperature	Tch	150	°C



Electrical Characteristics:

			Value			
	Symbol	Test condition	Min	Тур	Max	Unit
Drain Current	ldsr	Vds=10V CW. Pin: 33dBm Freq: 5.9~6.4GHz	-	3.7	-	А
1dB output power	P1dB		41	41.5	-	dBm
Gain	Gp		8	8.5	-	dB
Add-Efficiency	PAE		-	30	-	%
Gain Flatness	ΔG		-0.8	-	+0.8	dB


Typical Curve:

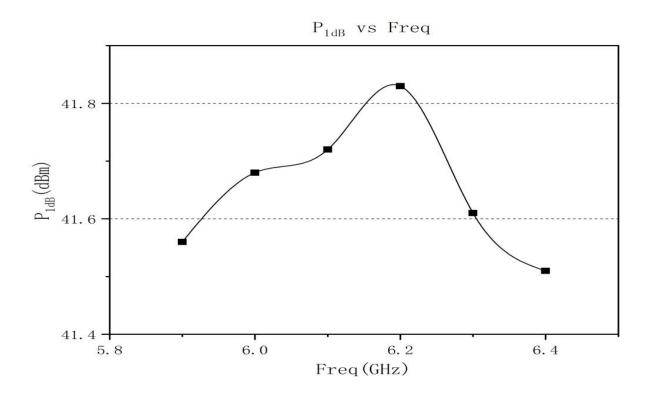


If you need more detailed product information, please contact our marketing personnel or designers. Contact: Peter.Zhang Email: peter.zhang@anserrf.com



Internal Matching GaAs Device

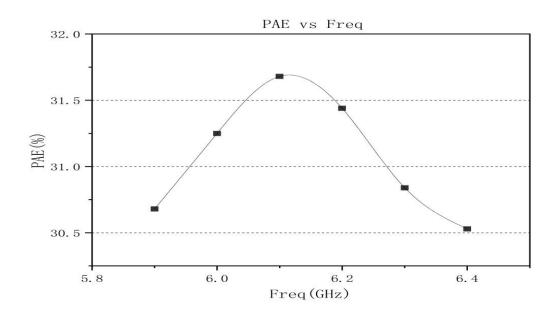

Application Circuit:

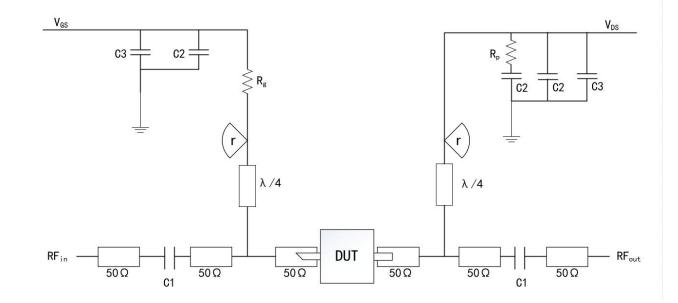

DUT: Device to be tested


C1:3pF	Rp:51Ω
C2:1000pF	Rg:15Ω
C3:100uF	r(radius)≈4.5mm(Rogers5880, 20mil)



ESD Level:



Outline:

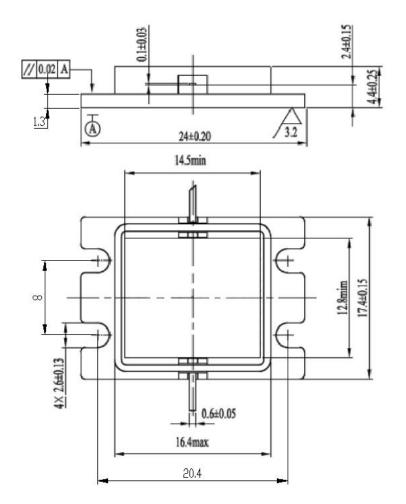

Precautions for use:

- Pay attention to drying transportation and storage.
- Pay attention to anti-static during chip use and assembly, and wear grounding anti-static bracelet.
- When powering up, first apply grid power then add leakage.